



慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
Product specification

电气性能/Electrical

参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 320V
 额定电流/Rated current: 10A 20A
 接触电阻/Contact resistance: 20m Ω
 使用线径/Wire range: 22-14AWG 2.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500M Ω /DC1000V

机械性能/Mechanical



温度范围/Temp Range: -40 $^{\circ}$ C⁺+105 $^{\circ}$ C
 扭矩/Torque: 0.4Nm (3.616 in)
 剥线长度/Strip length: 5-6mm

尺寸/Dimensions

间距/Pitch: 5.08mm
 极数/Poles: 2P-24P

材料及电镀/Material


塑件/Housing: PA66, UL94V-0
 螺丝/Screws: M2.5, steel Zinc plated
 方块/Wire guard: Brass, Ni plated
 簧片/Clamp: Phosphor bronze, Ni plated

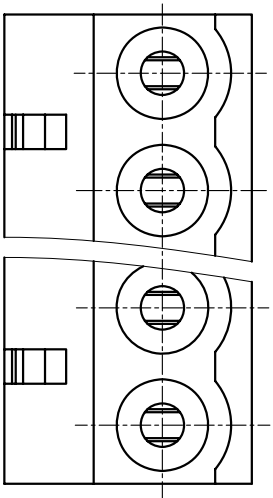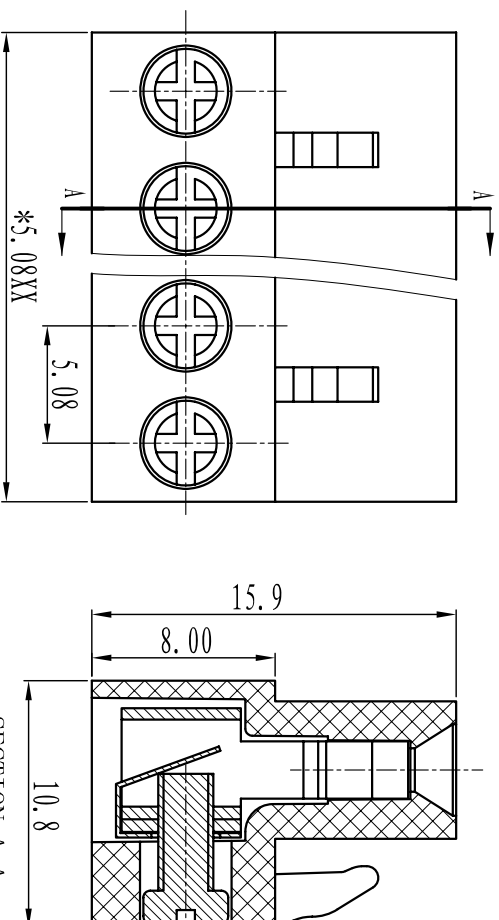

TOLERANCES EXCEPT AS NOTED

	linear dimension	fillet	chamfer	short angle sid	over 120	over 120	over 120	over 120	over 120	over 120	over 120	over 120	over 120
variable range	6 to 30	6 to 30	6 to 30	10 to 50	5 to 30	5 to 30	5 to 30	5 to 30	5 to 30	5 to 30	5 to 30	5 to 30	5 to 30
tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1 $^{\circ}$	30'	20'	10'	0.5

订购方式: HOW TO ORDER

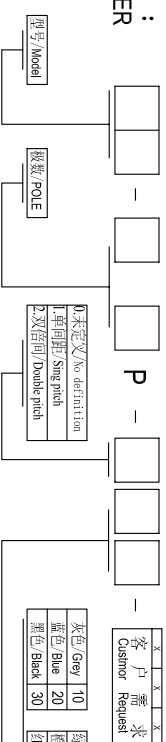

单位/UNITS	尺寸/SIZE	A4	比例/SCALE
----------	---------	----	----------



第一视角/FIRST ANGLE PROJECTION



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME HT508K-5-08-XP-1YY-00A