


TRANSZORB® Transient Voltage Suppressors

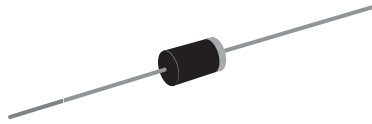

DO-204AC (DO-15)

| PRIMARY CHARACTERISTICS | |
|----------------------------------|----------------|
| V_{BR} uni-directional | 6.8 V to 540 V |
| V_{BR} bi-directional | 6.8 V to 440 V |
| P_{PPM} | 600 W |
| P_D | 5.0 W |
| I_{FSM} (uni-directional only) | 100 A |
| T_J max. | 175 °C |

DEVICES FOR BI-DIRECTION APPLICATIONS

For bi-directional types, use C or CA suffix (e.g. P6KE440CA).

Electrical characteristics apply in both directions.

FEATURES

- Glass passivated chip junction
- Available in uni-directional and bi-directional
- 600 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle): 0.01 %
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Solder dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

MECHANICAL DATA

Case: DO-204AC, molded epoxy over passivated chip
Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

Polarity: For uni-directional types the color band denotes cathode end, no marking on bi-directional types

| MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted) | | | |
|---|----------------|----------------|------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Peak power dissipation with a 10/1000 μ s waveform ⁽¹⁾ (Fig. 1) | P_{PPM} | 600 | W |
| Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾ | I_{PPM} | See next table | A |
| Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 5) | P_D | 5.0 | W |
| Peak forward surge current, 8.3 ms single half sine-wave ⁽²⁾ | I_{FSM} | 100 | A |
| Maximum instantaneous forward voltage at 50 A for uni-directional only ⁽³⁾ | V_F | 3.5/5.0 | V |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to + 175 | °C |

Notes:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2

(2) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 per minute maximum

(3) $V_F = 3.5$ V for P6KE220(A) and below; $V_F = 5.0$ V for P6KE250(A) and above

P6KE6.8 thru P6KE540A

Vishay General Semiconductor



| ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted) | | | | | | | | |
|--|--|------|----------------------------------|---------------------------------------|---|--|---|---|
| DEVICE TYPE | BREAKDOWN VOLTAGE V _{BR} AT I _T ⁽¹⁾ (V) | | TEST CURRENT I _T (mA) | STAND-OFF VOLTAGE V _{WM} (V) | MAXIMUM REVERSE LEAKAGE AT V _{WM} ⁽³⁾ I _D (μA) | PEAK PULSE CURRENT I _{PPM} ⁽²⁾ (A) | MAXIMUM CLAMPING VOLTAGE AT I _{PPM} V _C (V) | MAXIMUM TEMPERATURE COEFFICIENT OF V _{BR} (%/°C) |
| | MIN | MAX | | | | | | |
| (+)P6KE6.8 | 6.12 | 7.48 | 10 | 5.50 | 1000 | 55.6 | 10.8 | 0.057 |
| (+)P6KE6.8A | 6.45 | 7.14 | 10 | 5.80 | 1000 | 57.1 | 10.5 | 0.057 |
| (+)P6KE7.5 | 6.75 | 8.25 | 10 | 6.05 | 500 | 51.3 | 11.7 | 0.061 |
| (+)P6KE7.5A | 7.13 | 7.88 | 10 | 6.40 | 500 | 53.1 | 11.3 | 0.061 |
| (+)P6KE8.2 | 7.38 | 9.02 | 10 | 6.63 | 200 | 48.0 | 12.5 | 0.065 |
| (+)P6KE8.2A | 7.79 | 8.61 | 10 | 7.02 | 200 | 49.6 | 12.1 | 0.065 |
| (+)P6KE9.1 | 8.19 | 10.0 | 1.0 | 7.37 | 50 | 43.5 | 13.8 | 0.068 |
| (+)P6KE9.1A | 8.65 | 9.55 | 1.0 | 7.78 | 50 | 44.8 | 13.4 | 0.068 |
| (+)P6KE10 | 9.00 | 11.0 | 1.0 | 8.10 | 10 | 40.0 | 15.0 | 0.073 |
| (+)P6KE10A | 9.50 | 10.5 | 1.0 | 8.55 | 10 | 41.4 | 14.5 | 0.073 |
| (+)P6KE11 | 9.90 | 12.1 | 1.0 | 8.92 | 5.0 | 37.0 | 16.2 | 0.075 |
| (+)P6KE11A | 10.5 | 11.6 | 1.0 | 9.40 | 5.0 | 38.5 | 15.6 | 0.075 |
| (+)P6KE12 | 10.8 | 13.2 | 1.0 | 9.72 | 5.0 | 34.7 | 17.3 | 0.078 |
| (+)P6KE12A | 11.4 | 12.6 | 1.0 | 10.2 | 5.0 | 35.9 | 16.7 | 0.078 |
| (+)P6KE13 | 11.7 | 14.3 | 1.0 | 10.5 | 5.0 | 31.6 | 19.0 | 0.081 |
| (+)P6KE13A | 12.4 | 13.7 | 1.0 | 11.1 | 5.0 | 33.0 | 18.2 | 0.081 |
| (+)P6KE15 | 13.5 | 16.5 | 1.0 | 12.1 | 1.0 | 27.3 | 22.0 | 0.084 |
| (+)P6KE15A | 14.3 | 15.8 | 1.0 | 12.8 | 1.0 | 28.3 | 21.2 | 0.084 |
| (+)P6KE16 | 14.4 | 17.6 | 1.0 | 12.9 | 1.0 | 25.5 | 23.5 | 0.086 |
| (+)P6KE16A | 15.2 | 16.8 | 1.0 | 13.6 | 1.0 | 26.7 | 22.5 | 0.086 |
| (+)P6KE18 | 16.2 | 19.8 | 1.0 | 14.5 | 1.0 | 22.6 | 26.5 | 0.088 |
| (+)P6KE18A | 17.1 | 18.9 | 1.0 | 15.3 | 1.0 | 23.8 | 25.2 | 0.088 |
| (+)P6KE20 | 18.0 | 22.0 | 1.0 | 16.2 | 1.0 | 20.6 | 29.1 | 0.090 |
| (+)P6KE20A | 19.0 | 21.0 | 1.0 | 17.1 | 1.0 | 21.7 | 27.7 | 0.090 |
| (+)P6KE22 | 19.8 | 24.2 | 1.0 | 17.8 | 1.0 | 18.8 | 31.9 | 0.092 |
| (+)P6KE22A | 20.9 | 23.1 | 1.0 | 18.8 | 1.0 | 19.6 | 30.6 | 0.092 |
| (+)P6KE24 | 21.6 | 26.4 | 1.0 | 19.4 | 1.0 | 17.3 | 34.7 | 0.094 |
| (+)P6KE24A | 22.8 | 25.2 | 1.0 | 20.5 | 1.0 | 18.1 | 33.2 | 0.094 |
| (+)P6KE27 | 24.3 | 29.7 | 1.0 | 21.8 | 1.0 | 15.3 | 39.1 | 0.096 |
| (+)P6KE27A | 25.7 | 28.4 | 1.0 | 23.1 | 1.0 | 16.0 | 37.5 | 0.096 |
| (+)P6KE30 | 27.0 | 33.0 | 1.0 | 24.3 | 1.0 | 13.8 | 43.5 | 0.097 |
| (+)P6KE30A | 28.5 | 31.5 | 1.0 | 25.6 | 1.0 | 14.5 | 41.4 | 0.097 |
| (+)P6KE33 | 29.7 | 36.3 | 1.0 | 26.8 | 1.0 | 12.6 | 47.7 | 0.098 |
| (+)P6KE33A | 31.4 | 34.7 | 1.0 | 28.2 | 1.0 | 13.1 | 45.7 | 0.098 |
| (+)P6KE36 | 32.4 | 39.6 | 1.0 | 29.1 | 1.0 | 11.5 | 52.0 | 0.099 |
| (+)P6KE36A | 34.2 | 37.8 | 1.0 | 30.8 | 1.0 | 12.0 | 49.9 | 0.099 |
| (+)P6KE39 | 35.1 | 42.9 | 1.0 | 31.6 | 1.0 | 10.6 | 56.4 | 0.100 |
| (+)P6KE39A | 37.1 | 41.0 | 1.0 | 33.3 | 1.0 | 11.1 | 53.9 | 0.100 |
| (+)P6KE43 | 38.7 | 47.3 | 1.0 | 34.8 | 1.0 | 9.7 | 61.9 | 0.101 |
| (+)P6KE43A | 40.9 | 45.2 | 1.0 | 36.8 | 1.0 | 10.1 | 59.3 | 0.101 |
| (+)P6KE47 | 42.3 | 51.7 | 1.0 | 38.1 | 1.0 | 8.8 | 67.8 | 0.101 |
| (+)P6KE47A | 44.7 | 49.4 | 1.0 | 40.2 | 1.0 | 9.3 | 64.8 | 0.101 |



| ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | | | |
|--|--|------|-------------------------|--------------------------------|--|---|---|--|
| DEVICE TYPE | BREAKDOWN VOLTAGE V_{BR} AT I_T ⁽¹⁾ (V) | | TEST CURRENT I_T (mA) | STAND-OFF VOLTAGE V_{WM} (V) | MAXIMUM REVERSE LEAKAGE AT V_{WM} ⁽³⁾ I_D (μA) | PEAK PULSE CURRENT I_{PPM} ⁽²⁾ (A) | MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V) | MAXIMUM TEMPERATURE COEFFICIENT OF V_{BR} (%/ $^\circ\text{C}$) |
| | MIN | MAX | | | | | | |
| (+)P6KE51 | 45.9 | 56.1 | 1.0 | 41.3 | 1.0 | 8.2 | 73.5 | 0.102 |
| (+)P6KE51A | 48.5 | 53.6 | 1.0 | 43.6 | 1.0 | 8.6 | 70.1 | 0.102 |
| (+)P6KE56 | 50.4 | 61.6 | 1.0 | 45.4 | 1.0 | 7.5 | 80.5 | 0.103 |
| (+)P6KE56A | 53.2 | 58.8 | 1.0 | 47.8 | 1.0 | 7.8 | 77.0 | 0.103 |
| (+)P6KE62 | 55.8 | 68.2 | 1.0 | 50.2 | 1.0 | 6.7 | 89.0 | 0.104 |
| (+)P6KE62A | 58.9 | 65.1 | 1.0 | 53.0 | 1.0 | 7.1 | 85.0 | 0.104 |
| (+)P6KE68 | 61.2 | 74.8 | 1.0 | 55.1 | 1.0 | 6.1 | 98.0 | 0.104 |
| (+)P6KE68A | 64.6 | 71.4 | 1.0 | 58.1 | 1.0 | 6.5 | 92.0 | 0.104 |
| (+)P6KE75 | 67.5 | 82.5 | 1.0 | 60.7 | 1.0 | 5.6 | 108 | 0.105 |
| (+)P6KE75A | 71.3 | 78.8 | 1.0 | 64.1 | 1.0 | 5.8 | 103 | 0.105 |
| (+)P6KE82 | 73.8 | 90.2 | 1.0 | 66.4 | 1.0 | 5.1 | 118 | 0.105 |
| (+)P6KE82A | 77.9 | 86.1 | 1.0 | 70.1 | 1.0 | 5.3 | 113 | 0.105 |
| (+)P6KE91 | 81.9 | 100 | 1.0 | 73.7 | 1.0 | 4.6 | 131 | 0.106 |
| (+)P6KE91A | 86.5 | 95.5 | 1.0 | 77.8 | 1.0 | 4.8 | 125 | 0.106 |
| (+)P6KE100 | 90.0 | 110 | 1.0 | 81.0 | 1.0 | 4.2 | 144 | 0.106 |
| (+)P6KE100A | 95.0 | 105 | 1.0 | 85.5 | 1.0 | 4.4 | 137 | 0.106 |
| (+)P6KE110 | 99.0 | 121 | 1.0 | 89.2 | 1.0 | 3.8 | 158 | 0.107 |
| (+)P6KE110A | 105 | 116 | 1.0 | 94.0 | 1.0 | 3.9 | 152 | 0.107 |
| (+)P6KE120 | 108 | 132 | 1.0 | 97.2 | 1.0 | 3.5 | 173 | 0.107 |
| (+)P6KE120A | 114 | 126 | 1.0 | 102 | 1.0 | 3.6 | 165 | 0.107 |
| (+)P6KE130 | 117 | 143 | 1.0 | 105 | 1.0 | 3.2 | 187 | 0.107 |
| (+)P6KE130A | 124 | 137 | 1.0 | 111 | 1.0 | 3.4 | 179 | 0.107 |
| (+)P6KE150 | 135 | 165 | 1.0 | 121 | 1.0 | 2.8 | 215 | 0.108 |
| (+)P6KE150A | 143 | 158 | 1.0 | 128 | 1.0 | 2.9 | 207 | 0.108 |
| (+)P6KE160 | 144 | 176 | 1.0 | 130 | 1.0 | 2.6 | 230 | 0.108 |
| (+)P6KE160A | 152 | 168 | 1.0 | 136 | 1.0 | 2.7 | 219 | 0.108 |
| (+)P6KE170 | 153 | 187 | 1.0 | 138 | 1.0 | 2.5 | 244 | 0.108 |
| (+)P6KE170A | 162 | 179 | 1.0 | 145 | 1.0 | 2.6 | 234 | 0.108 |
| (+)P6KE180 | 162 | 198 | 1.0 | 146 | 1.0 | 2.3 | 258 | 0.108 |
| (+)P6KE180A | 171 | 189 | 1.0 | 154 | 1.0 | 2.4 | 246 | 0.108 |
| (+)P6KE200 | 180 | 220 | 1.0 | 162 | 1.0 | 2.1 | 287 | 0.108 |
| (+)P6KE200A | 190 | 210 | 1.0 | 171 | 1.0 | 2.2 | 274 | 0.108 |
| (+)P6KE220 | 198 | 242 | 1.0 | 175 | 1.0 | 1.7 | 344 | 0.108 |
| (+)P6KE220A | 209 | 231 | 1.0 | 185 | 1.0 | 1.8 | 328 | 0.108 |
| (+)P6KE250 | 225 | 275 | 1.0 | 202 | 1.0 | 1.7 | 360 | 0.110 |
| (+)P6KE250A | 237 | 263 | 1.0 | 214 | 1.0 | 1.7 | 344 | 0.110 |
| (+)P6KE300 | 270 | 330 | 1.0 | 243 | 1.0 | 1.4 | 430 | 0.110 |
| (+)P6KE300A | 285 | 315 | 1.0 | 256 | 1.0 | 1.4 | 414 | 0.110 |
| (+)P6KE350 | 315 | 385 | 1.0 | 284 | 1.0 | 1.2 | 504 | 0.110 |
| (+)P6KE350A | 333 | 368 | 1.0 | 300 | 1.0 | 1.2 | 482 | 0.110 |
| (+)P6KE400 | 360 | 440 | 1.0 | 324 | 1.0 | 1.0 | 574 | 0.110 |
| (+)P6KE400A | 380 | 420 | 1.0 | 342 | 1.0 | 1.1 | 548 | 0.110 |

P6KE6.8 thru P6KE540A

Vishay General Semiconductor



| ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | | | |
|--|--|-----|-------------------------|--------------------------------|--|---|---|--|
| DEVICE TYPE | BREAKDOWN VOLTAGE V_{BR} AT I_T ⁽¹⁾ (V) | | TEST CURRENT I_T (mA) | STAND-OFF VOLTAGE V_{WM} (V) | MAXIMUM REVERSE LEAKAGE AT V_{WM} ⁽³⁾ I_D (μA) | PEAK PULSE CURRENT I_{PPM} ⁽²⁾ (A) | MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V) | MAXIMUM TEMPERATURE COEFFICIENT OF V_{BR} (%/ $^\circ\text{C}$) |
| | MIN | MAX | | | | | | |
| (+)P6KE440 | 396 | 484 | 1.0 | 356 | 1.0 | 0.95 | 631 | 0.110 |
| (+)P6KE440A | 418 | 462 | 1.0 | 376 | 1.0 | 1.00 | 602 | 0.110 |
| P6KE480 | 432 | 528 | 1.0 | 389 | 1.0 | 0.88 | 686 | 0.110 |
| P6KE480A | 456 | 504 | 1.0 | 408 | 1.0 | 0.91 | 658 | 0.110 |
| P6KE510 | 459 | 561 | 1.0 | 413 | 1.0 | 0.82 | 729 | 0.110 |
| P6KE510A | 485 | 535 | 1.0 | 434 | 1.0 | 0.86 | 698 | 0.110 |
| P6KE540 | 486 | 594 | 1.0 | 437 | 1.0 | 0.78 | 772 | 0.110 |
| P6KE540A | 513 | 567 | 1.0 | 459 | 1.0 | 0.81 | 740 | 0.110 |

Notes:

- (1) Pulse test: $t_p \leq 50\text{ ms}$
- (2) Surge current waveform per Fig. 3 and derate per Fig. 2
- (3) For bi-directional types with V_{WM} of 10 V and less, the I_D limit is doubled
- (4) All terms and symbols are consistent with ANSI/IEEE C62.35
- (+) Underwriters laboratory recognition for the classification of protectors (QVQG2) under the UL standard for safety 497B and file number E136766 for both uni-directional and bi-directional devices

| THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | |
|---|-----------------|-------|--------------------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Typical thermal resistance, junction to lead | $R_{\theta JL}$ | 20 | $^\circ\text{C/W}$ |
| Typical thermal resistance, junction to ambient | $R_{\theta JA}$ | 75 | $^\circ\text{C/W}$ |

| ORDERING INFORMATION (Example) | | | | |
|---------------------------------------|-----------------|------------------------|---------------|----------------------------------|
| PREFERRED P/N | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE |
| P6KE6.8A-E3/54 | 0.432 | 54 | 4000 | 13" diameter paper tape and reel |
| P6KE6.8AHE3/54 ⁽¹⁾ | 0.432 | 54 | 4000 | 13" diameter paper tape and reel |

Note:

- (1) Automotive grade AEC Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

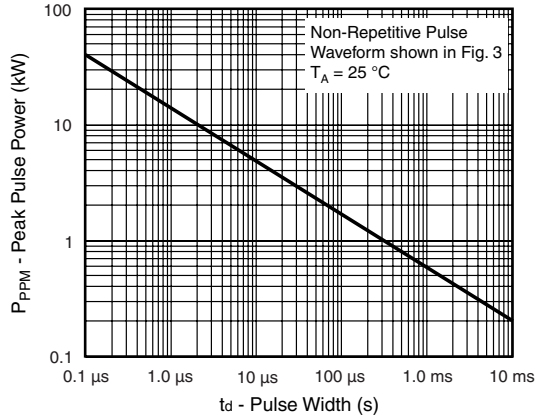


Figure 1. Peak Pulse Power Rating Curve

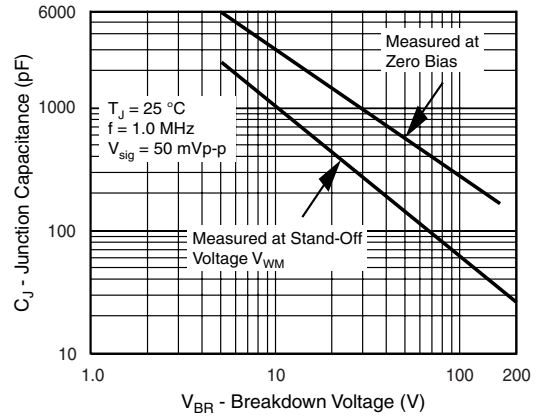


Figure 4. Typical Junction Capacitance Uni-Directional

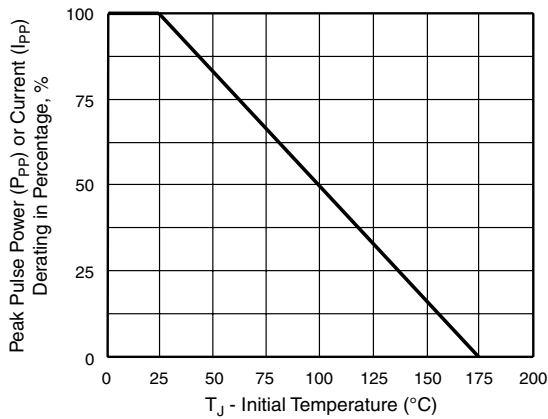


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

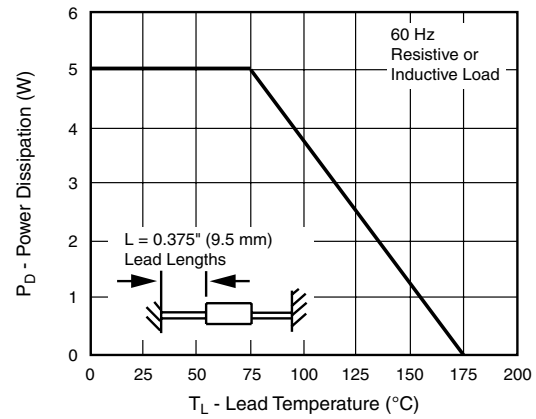


Figure 5. Power Derating Curve

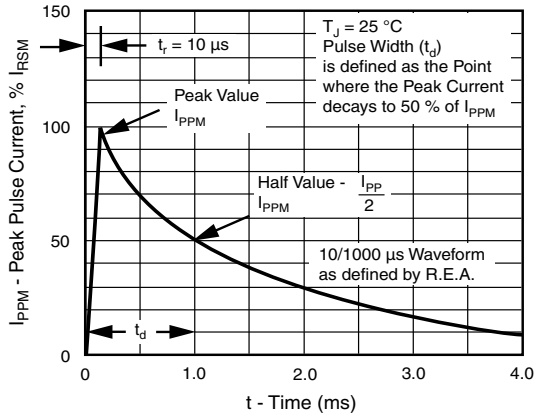


Figure 3. Pulse Waveform

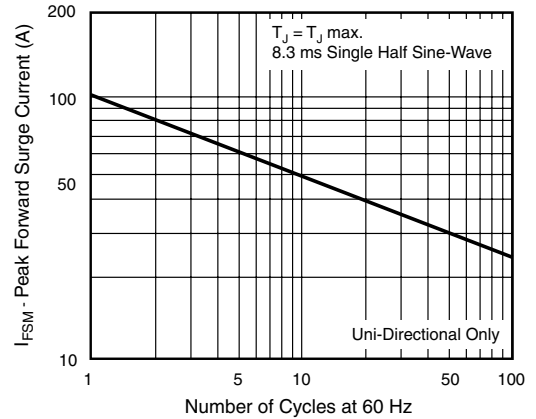


Figure 6. Maximum Non-Repetitive Forward Surge Current


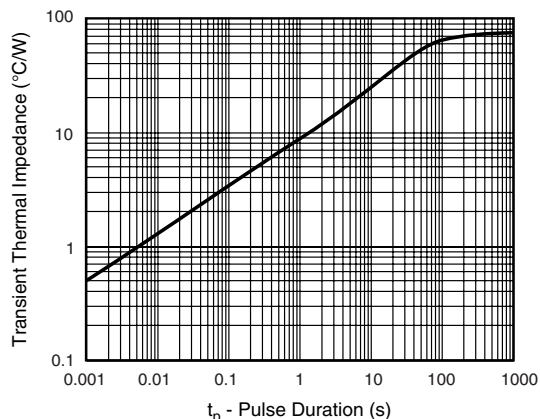


Figure 7. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

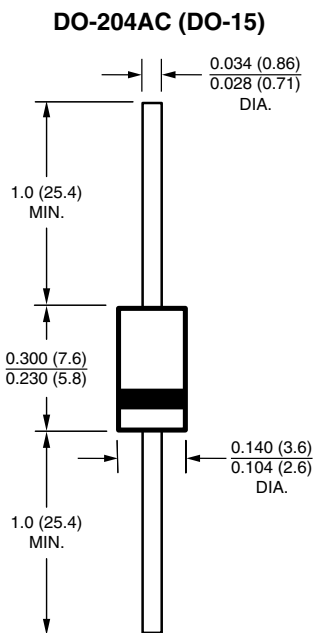

APPLICATION NOTE

This P6KE TVS series is a low cost commercial product for use in applications where large voltage transients can permanently damage voltage-sensitive components.

The P6KE series device types are designed in a small package size where power and space is a consideration. They are characterized by their high surge capability, extremely fast response time, and low impedance, (R_{on}). Because of the unpredictable nature of transients, and the variation of the impedance with respect to these transients, impedance, per se, is not specified as a parametric value. However, a minimum voltage at low current conditions (BV) and a maximum clamping voltage (V_C) at a maximum peak pulse current is specified.

In some instances, the thermal effect (see V_C Clamping Voltage) may be responsible for 50 % to 70 % of the observed voltage differential when subjected to high current pulses for several duty cycles, thus making a maximum impedance specification insignificant.

In case of a severe current overload or abnormal transient beyond the maximum ratings, the Transient Voltage Suppressor will initially fail 'short' thus tripping the system's circuit breaker or fuse while protecting the entire circuit. Curves depicting clamping voltage vs. various current pulses are available from the factory. Extended power curves vs. pulse time are also available.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.